



**Key Features**


- Parallel CCTV camera connection
- Fuses can be upgraded to 1 amp
- Input voltage AC 110~120
- 10 Amp




**Specifications**

**12VDC 18 OUTPUT SWITCH MODE  
CCTV POWER SUPPLY**

**Connection Diagram:**

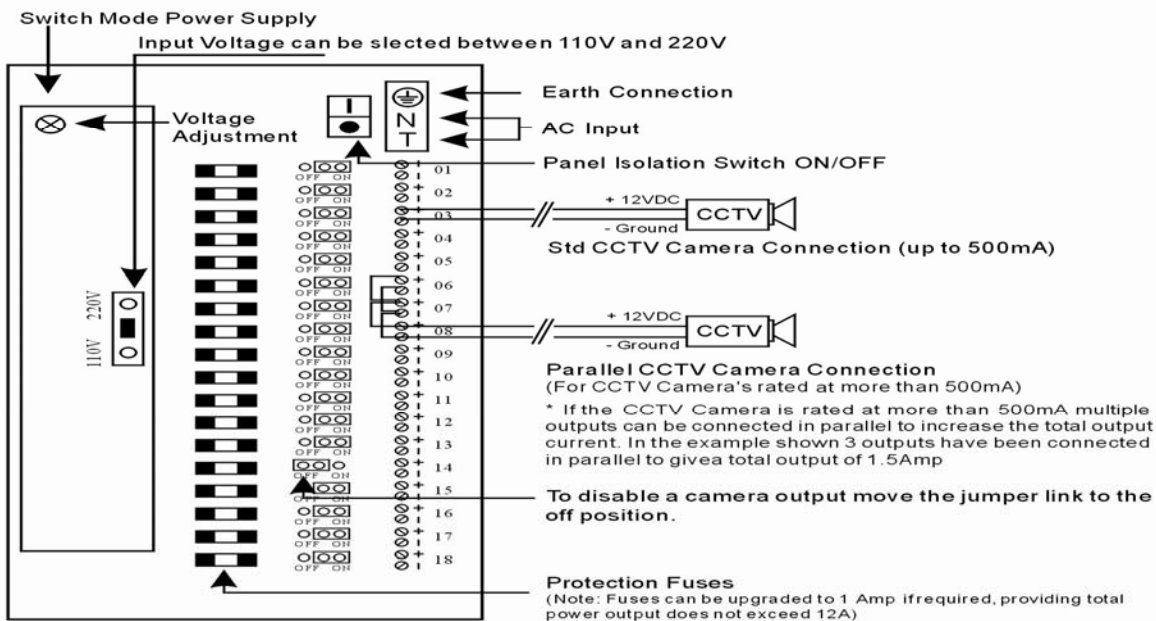

**Test & Measurement:**

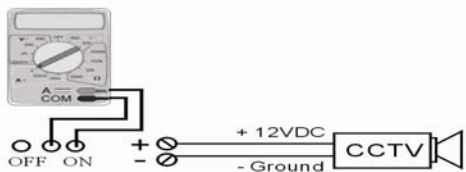

To determine the current(A) draw of a camera remove the jumper link, set your meter to A / Amps DC, and with the camera connected measure the current across the ON and COMMON terminals.



LED Fuse Status Indicator  
LED ON = Fuse OK  
LED OFF = Fuse Fault

**Specifications:**

- Input Voltage: AC100~120V  
AC220~240V
- Output Current: 18 x 500mA fused outlets (10A Max)
- Output Power: 145W
- Dimensions(mm): 320(L) x 210(W) x 65(H)

\* For Indoor Use Only